


<p>NOTES:</p> <p>(1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.</p> <p>(2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.</p> <p>(3) INNER AND OUTER SURFACES OF TRANSOM MUST BE PARALLEL WITHIN 1/8 in. (3 mm) IN AREA COVERED BY TRANSOM PLATES AND REMAIN WITHIN TRANSOM THICKNESS LIMITS.</p> <p>(4) REFER TO "TRANSOM CUTOUT" IN THE INSTALLATION MANUAL TO FIND THE CRANKSHAFT CENTERLINE VS. BOAT BOTTOM.</p>					
<p>8M2010173 3.0 EC FRONT MOUNTS FWC</p>		<p>REVISION A</p>	<p>UNITS mm (in)</p>	<p>SCALE 1:12 25.4 mm = 305 mm 1" = 1'</p>	<p>SHEETS 1 OF 2</p>
<p>MERCURY MerCruiser</p>					

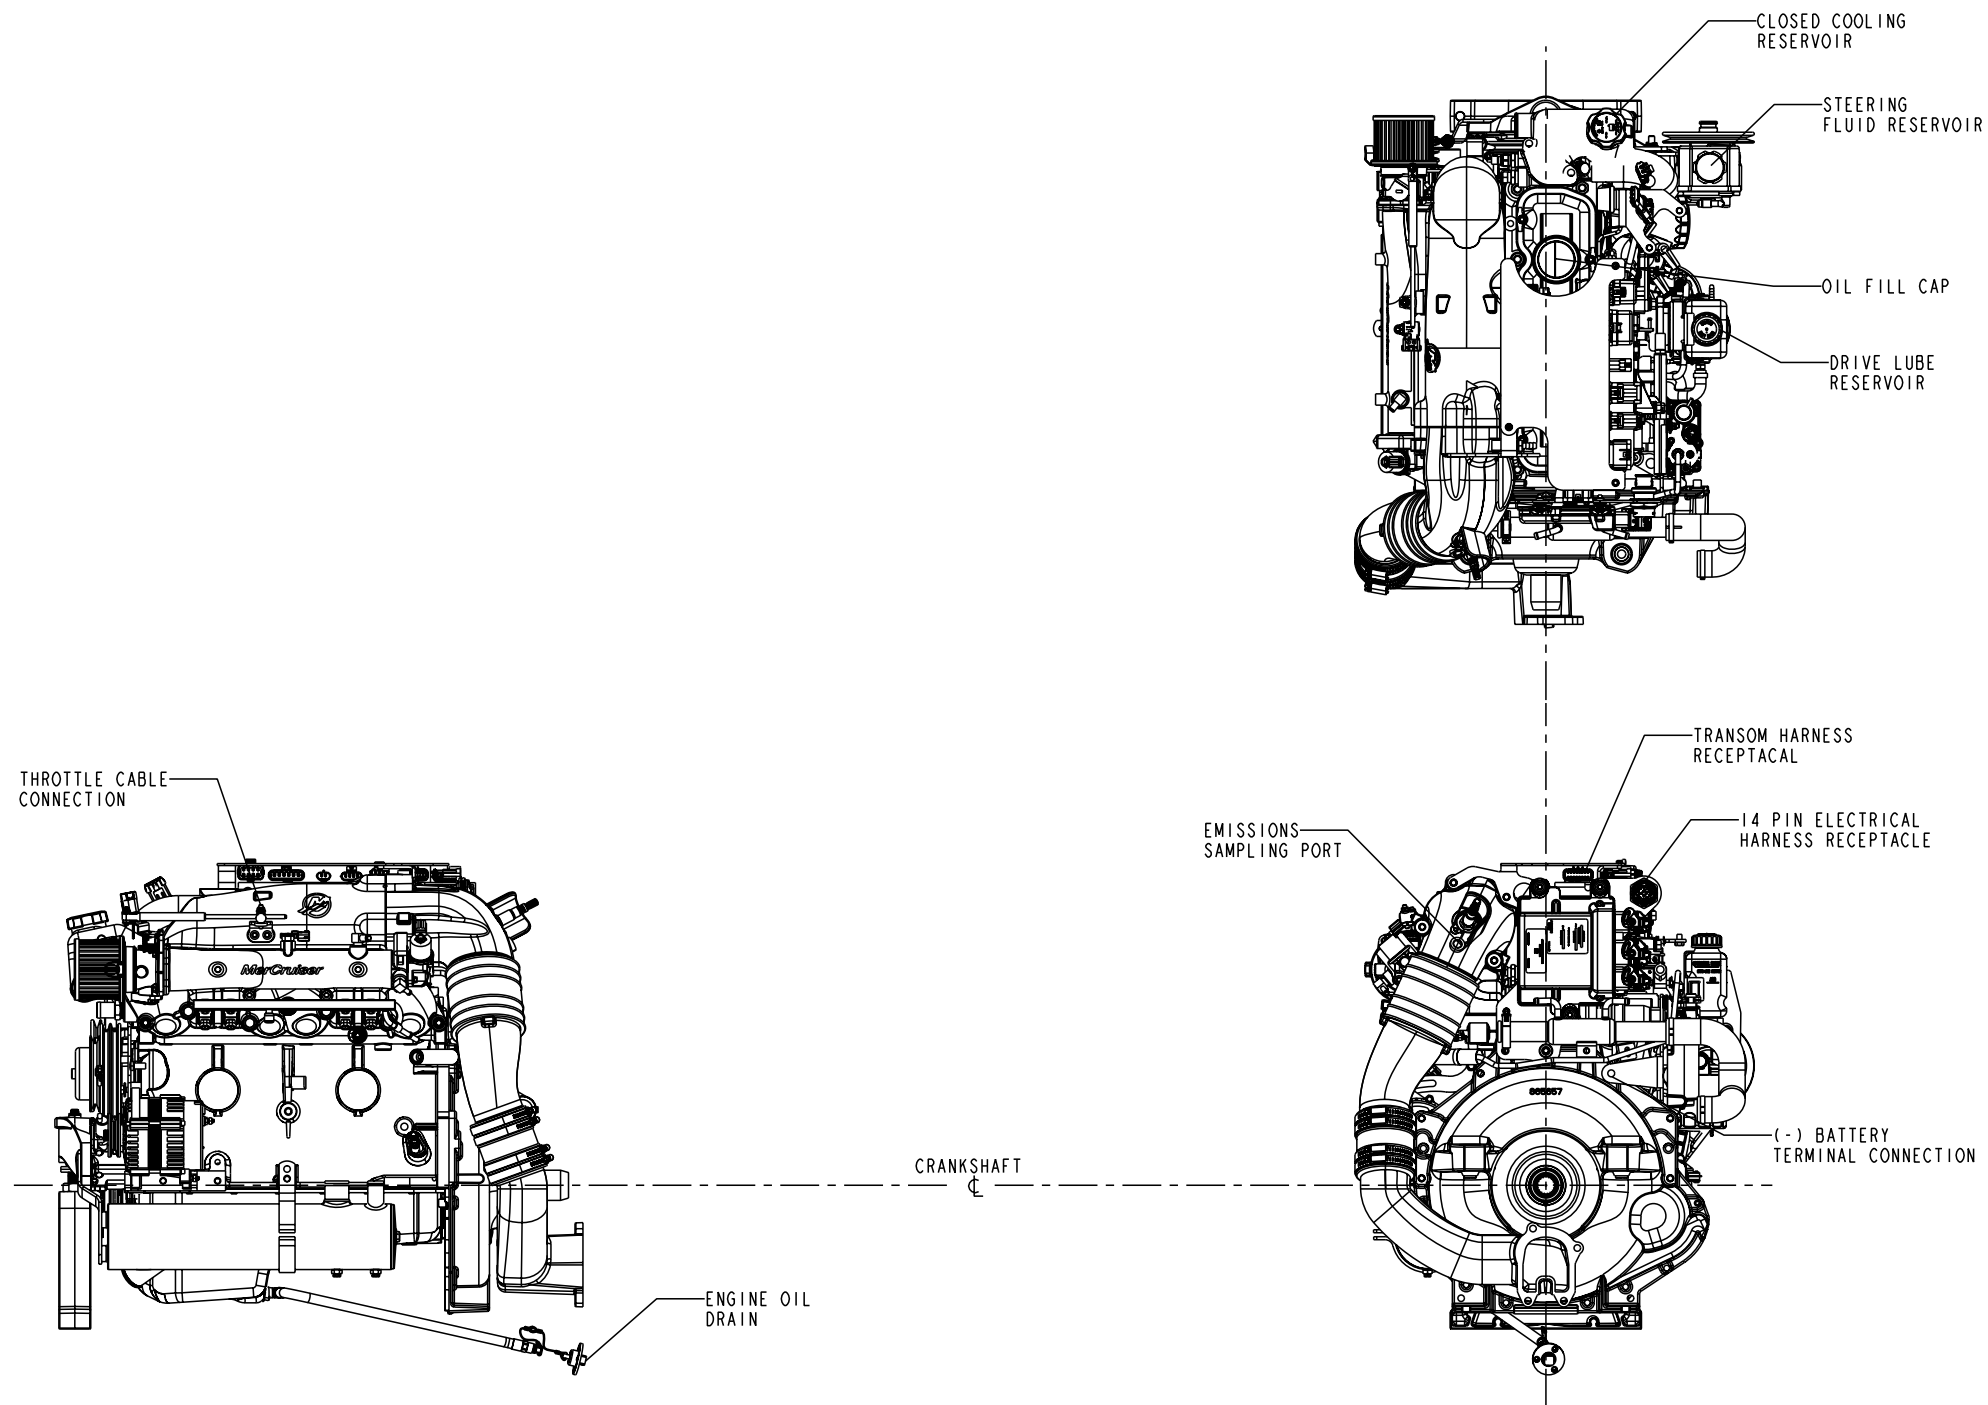

NOTES:
 (1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
 (2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
 (3) INNER AND OUTER SURFACES OF TRANSM MUST BE PARALLEL WITHIN 1/8 in. (3 mm) IN AREA COVERED BY TRANSM PLATES AND REMAIN WITHIN TRANSM THICKNESS LIMITS.
 (4) REFER TO "TRANSM CUTOUT" IN THE INSTALLATION MANUAL TO FIND THE CRANKSHAFT CENTERLINE VS. BOAT BOTTOM.

8M2010173 3.0 EC FRONT MOUNTS FWC	REVISION A	UNITS	SCALE	SHEETS 2 OF 2	
		mm (in)	1:12 25.4 mm = 305 mm 1" = 1'		